

Do Not Return Card

IMPORTANT

PLEASE DO NOT RETURN TO STORE

If You're Having Trouble, We're Here to Help!



Call us 24/7 at 1-855-292-4087

E-mail us at alsupport@sakar.com or visit us at alteclansing.com



WELCOME

Thank you for purchasing an Altec Lansing product. Download our App to unlock all the features our products have to offer!



JUST LISTEN.




MZX4515T

Active Noise Cancelling
'Kid Safe' ** Headphones
with Built-in Locator

QUICK START GUIDE

FCCID: 2AL9B-MZX4515T

In the Box

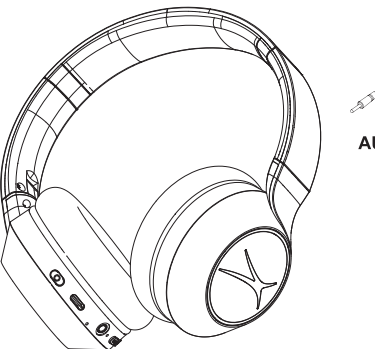

ANC 'Kid Safe'* Volume
Limiting Headphones
With Built-in Locator

* 'Kid Safe' is a marketing term which refers to the volume limiting capability of these headphones only.


CARRY ALONG
With Included
Carry Bag &
Carabiner

AUX Cable

3.5mm AUX to
USB-C adapter



USB-C Cable

A Closer Look

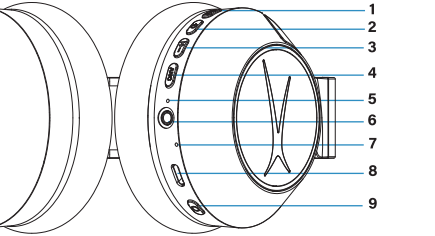

1. Next Track / Volume +
2. Multi-Function Button (Power/Play/Pause/Answer)
3. Previous Track / Volume -
4. ANC On/off
5. LED Indicator Light
6. Auxiliary Port
7. Microphone
8. Charging Port
9. Locator On/Off

Charging

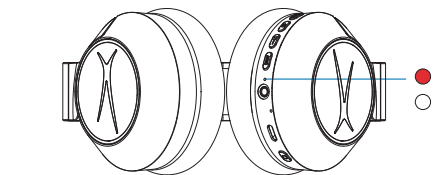


- Charging (solid red light)
- Fully charged (light off)

Connect the USB-C cable into the charging port, and connect the other end to a suitable USB charger or USB output to charge the headphone. The headphone's indicator will turn red while charging and turn off when it is fully charged.

Please charge the headphone when you hear a low battery alert or if it turns off automatically due to low battery. The headphone and the locator share the same battery. Continuing to use the headphone without charging will deplete the reserved power for the locator, thus significantly reducing its working time.

Powering On

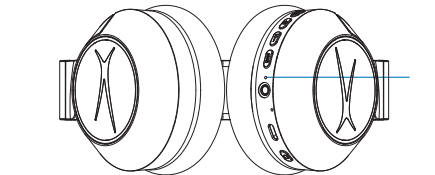

- Pairing Mode
Blue flashing LED

To turn on the headphone, press and hold the power button for 2-3s. The LED will flash Blue when the headphone is in pairing mode and go solid blue when connected.


Bluetooth Pairing



Once the headphone is on, look up your Bluetooth pairing list on your smart device and select "AL Kids ANC". The headphone LED light will turn into solid Blue, indicating that the headphone is now connected successfully.




Controls

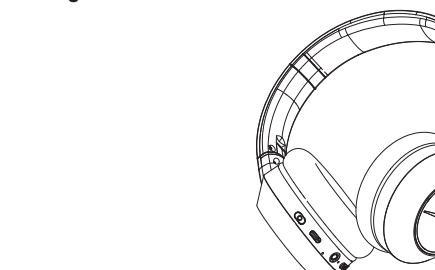

| Function | Required action |
|------------------------|---|
| Power ON/OFF | Press and hold the Power button for 2-3s |
| Play/Pause Music | When playing music, press the multi-function button to pause the music. Press again to resume playing the music. |
| Accept/End/Reject Call | When receive an incoming call, press the multi-function button to accept call, press again to end call. Press and hold the button for 2s to reject the incoming call. |
| Siri Voice Assistant | Press and hold the multi-function button to activate Siri or other voice assistant on your connected device. |
| Volume control | Tap the '+' button to increase the volume. Tap the '-' button to decrease the volume. |
| Next / Previous track | Press and hold the '+' button to advance to the next track. Press and hold the '-' button to return to the previous track. |

Locator

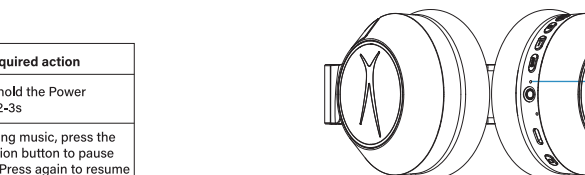

- 3s Locator On
- Locator Off

1. Turn on the locator: Press and hold the locator button, you will hear a beep, and the orange light will stay lit for 3 seconds.
2. When you are finding the headphone through Find My, the headphone will chime, press the locator button once to stop the chime.
3. Connection test: Press the locator button twice and the headphone will chime. This indicates that the locator is working normally.
4. Turn off the locator: Press the locator button 5 times, and you will hear a long beep sound, with no light indication.

Locate with
Apple Find My